

**Dockingstation-V2 (S/N 5.000 >)**

The Dockingstation is a compact charging- and synchronisation station that can hold up to 10 Podcatchers. It needs to be connected to a Syncbox using the provided USB cable. Use only the supplied USB cable. Standard USB cables do not support the Dock

**Specifications**

**Power (01)**

USB 2.0 port supporting BC 1.2 or 5V DC adapter (min. 5 Watt)

**Data interface (02)**

USB 2.0

**Capacity**

Up to 10 Podcatcher can be charged and synchronised.

**Color Led indicator (03)**

RGB LED indicator

**Sticker**

Sticker with Dock serialnumber on back side (04)

**Physical characteristics**

**Dimensions without Podcatchers**

140 x 185 x 60 mm (W x H x D)  
5.51 x 7.28 x 2.36" (W x H x D)

**Dimensions with Podcatchers**

140 x 185 x 140 mm (W x H x D)  
5.51 x 7.28 x 5.51" (W x H x D)

**Weight (Dock only)**


385 gr. / 13.58 oz

**Installation**

**Mounting (page 02) (05) (06)**

**Dockingstation LED status**

**Red:** Podcatchers not charging.





**White:** Podcatchers charging, no communication took place yet.



**Green:** Podcatchers charging.




**Blue:** Temporary indication on request from portal.

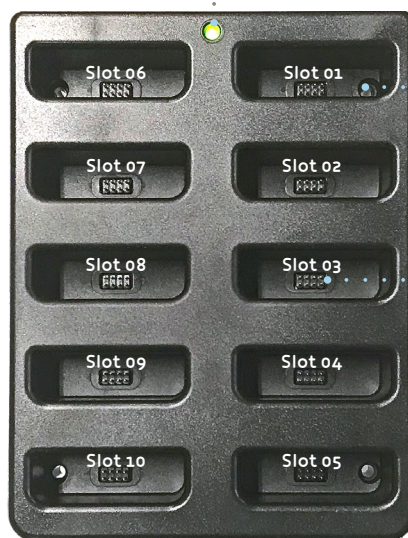

FRONT

140 mm / 5.51"

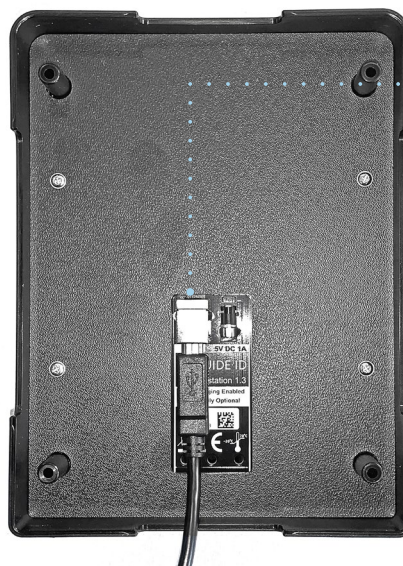


BACK

USB connector & charging (01,2)

185 mm / 7.28"



Sticker with serial (04)

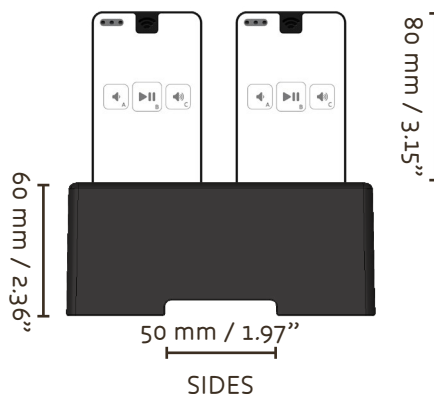

SIDES



Mounting on surfaces (page 02) >

**Dockinstation**


The Dockingstation is a compact charging- and synchronisation station that can hold up to 10 Podcatchers. It needs to be connected to a Syncbox using the provided USB cable. Use only the supplied USB cable. Standard USB cables do not support the Dock

**Installation**


**Mounting (05) (06)**

The Dock can be placed on a flat surface (table-top) or wall-mounted. It is possible to built the Docks in a piece of furniture. Keep the following guidelines in mind:



- Do not mount the Dock in a closed environment, always make sure fresh air can enter and warm air can escape.
- Do not mount the Dock in a drawer because cables can get lose.
- Keep enough space for cables and a Syncbox.

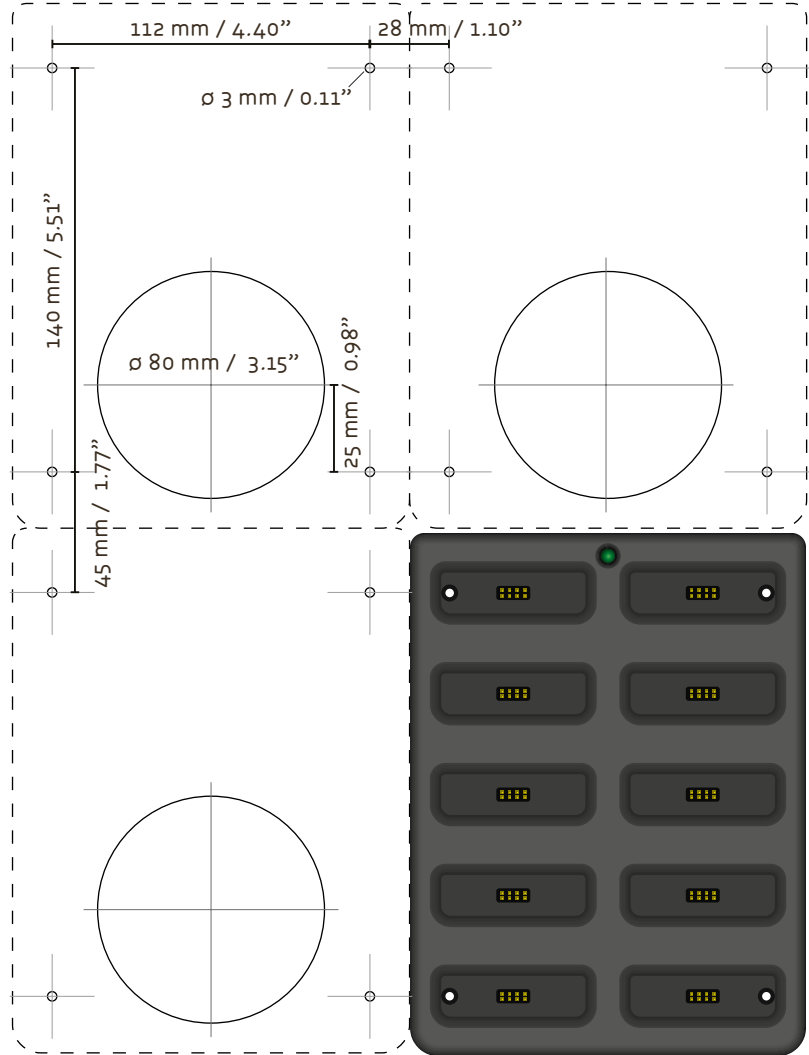

FRONT

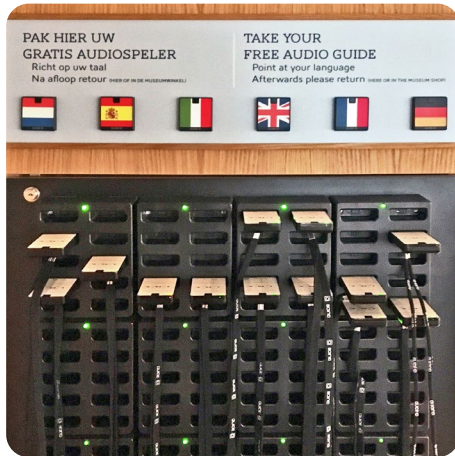

(06) Some examples of built-in Docks.

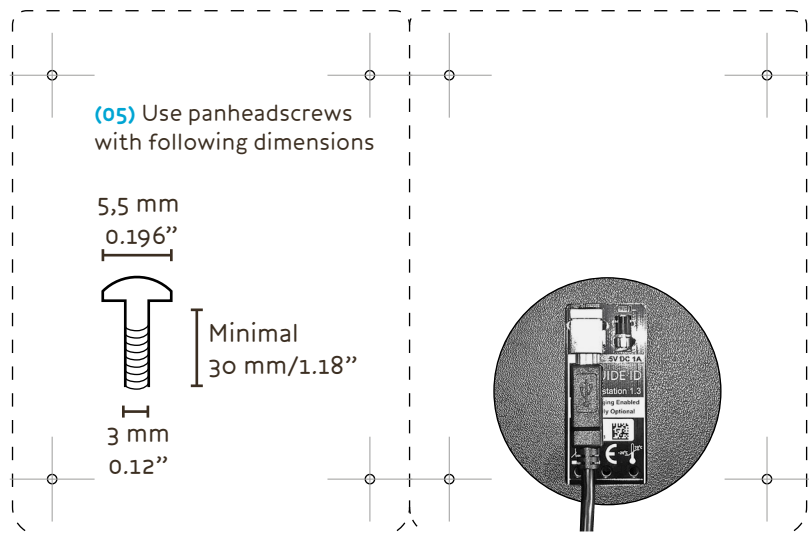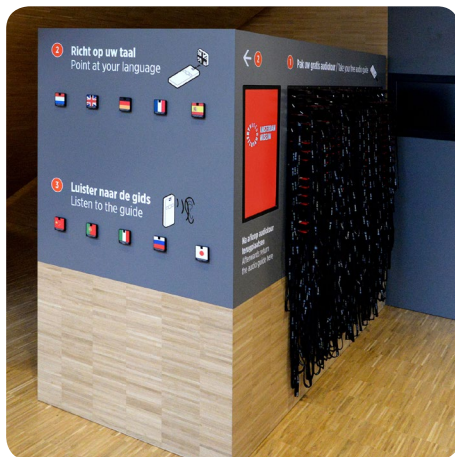

BACK