

**IDentifier V3**

The IDentifier is an infrared (IR) transmitter that is mounted next to the object on display. It triggers the corresponding audio on the Podcatcher.

**Specifications**

**Transmitter (01)**

Infrared (IRDA) 850 nm

**Power (02)**

2 x CR2032 lithium coin cell  
(user replacable, after ± 2 years)

**Front (03)**

replaceable front label, full colour,  
customisable artwork

**Physical characteristics**

**Dimensions**

54,3 (71,84) x 67,3 x 11 mm (W x H x D)  
2.14 (2.82) x 2.65 x 0.43" (W x H x D)

**Weight**

35 gr. / 1.23 oz (including batteries)

**Installation**

**Mounting (04) (05)**

The IDentifier can be firmly mounted using two screws, hanging with side clips (can also be broken off) or by using doublesided tape.

**Battery change (06)**

Changing batteries via front screws

**Infrared (01)**

The infrared signal is coming from the black square on top and should not be covered. It is possible to place the IDentifier behind glass, although this may limit its operating range.



**IDentifiercode (07)**

Sticker with serialnumber, to be linked in Tour Editor.

Infrared Transmitter (01)

Front label (03)  
customisable art work

Possibility to break down  
the clips (break backwards)

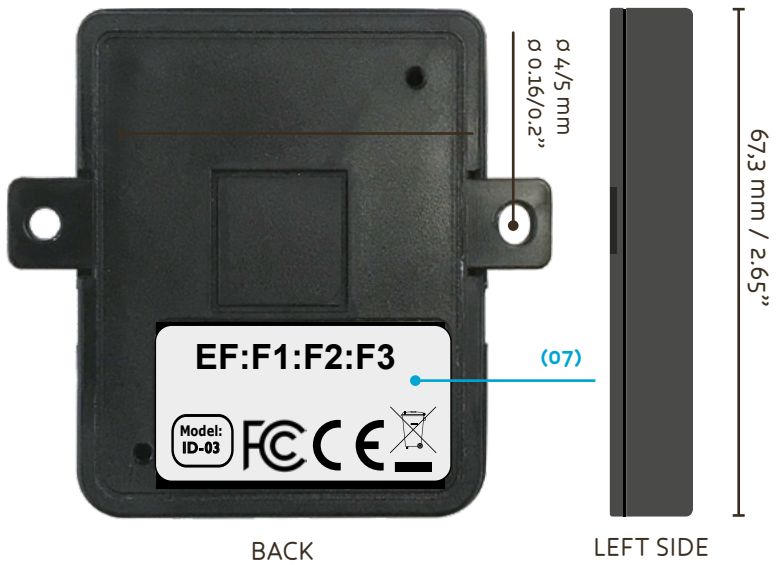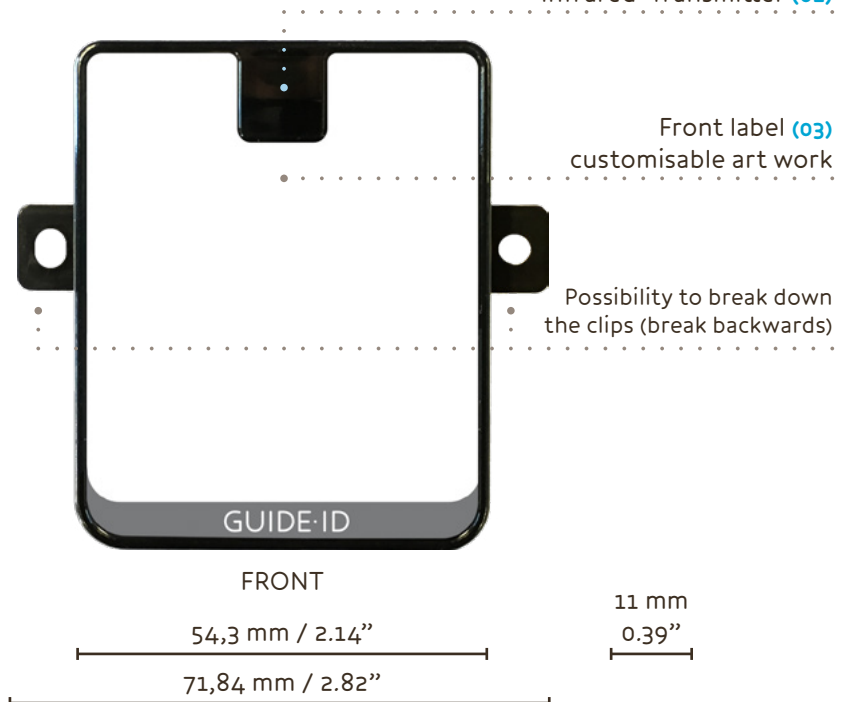

2 x CR2032 lithium coin cell (02)

Side clip (04)

Infrared Transmitter (01)

