

# IDentifier V3 Specsheet

## IDentifier V3

The IDentifier is an infrared (IR) transmitter and bluetooth (BT) that is mounted next to the object on display. It triggers the corresponding audio on the Podcatcher.

## Specifications Transmitter (01)

Infrared: (IrDA) 850 nm

Bluetooth: 2.4 GHz, measured power @ 1 meter -64dBm

Illustration - [IR distribution curve - page 2](#)

## Power (02)

2 x CR2032 lithium coin cell (user replaceable, after  $\pm 2$  years)

## Front (03)

replaceable front label, full colour, customisable artwork

## Waterproof (04)

IPX7

## Physical characteristics

### Dimensions

54,3 (71,84) x 67,3 x 11 mm (W x H x D)

2.14 (2.82) x 2.65 x 0.43" (W x H x D)

### Weight

35 gr. / 1.23 oz (including batteries)

## Installation

### IDentifiercode (08)

Sticker with serialnumber, to be linked in Toureditor.

### Mounting (05)

The IDentifier can be firmly mounted using two screws, hanging with side clips (can also be broken off) or by using doublesided tape.

### Infrared (01)


The infrared and bluetooth signal is coming from the black square on top and should not be covered.

It is possible to place the IDentifier behind glass, although this may limit its operating





[help.guideid.com](http://help.guideid.com)

Specsheet-IDentifier-20201103-v1

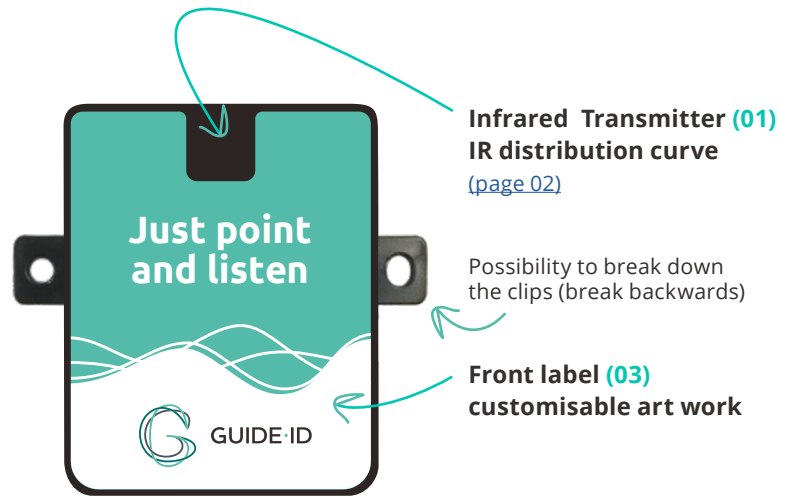


Front

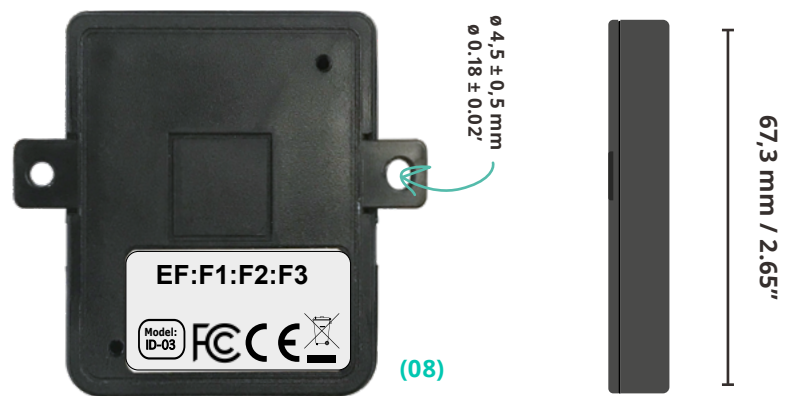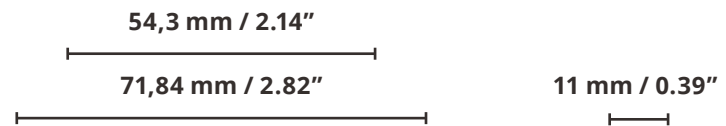

Back

Left side

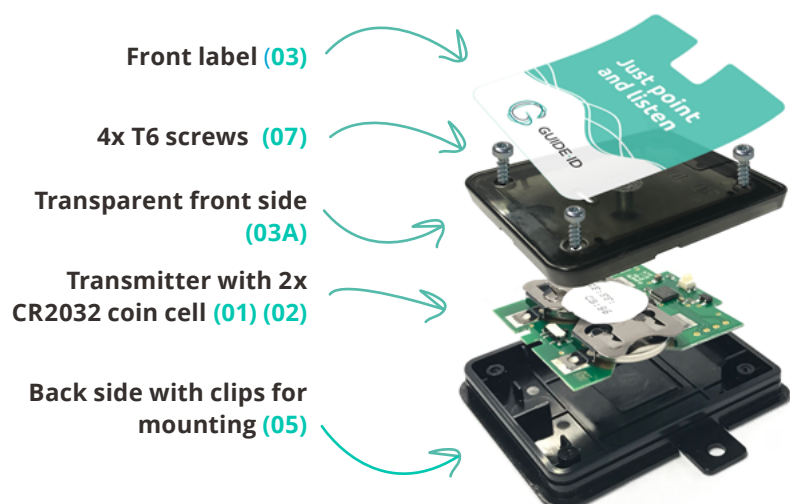

# Identifier V3 Transmitter

IR distribution curve

V3 Identifier Top view	
distance in cm / inch	width in cm / inch
0 / 0	0 / 0
20 / 7.78"	24 / 9.45"
40 / 15.4"	12 / 4.72"
60 / 23.6"	12 / 4.72"
80 / 31.94"	12 / 4.72"
100 / 39.37"	8 / 3.15"
102 / 40.15"	0 / 0"

Top View

